

KT3 SET-UP GUIDE

WARNING:

Fingers can be pinched when adjusting clamps with drum key.
Operate carefully. Be Careful around pipe ends, inside pipes and screw ends.
Metal shavings, etc. may injure your fingers

1 CHECK INCLUDED ITEMS

CYMBAL PADS BOX

12" CRASH (2)
DUAL ZONE PADS



14" RIDE (1)
DUAL ZONE PADS




12" HI-HAT (1)
SINGLE ZONE - NO CHOKE




HI-HAT PEDAL BOX

HI-HAT PEDAL (1)




DRUM PADS BOX


9" TOMS (2)
DUAL ZONE PADS



11" TOMS (2)
DUAL ZONE PADS




11" SNARE PAD (1)



DRUM MODULE BOX

DRUM MODULE (1)



ACCESSORIES BOX

BEATER (1)



CABLE HOLDER (1)




DRUMSTICKS (2)



PATCH CABLES (2)




DRUM KEY (1)




HAND SCREWS (2)



AC ADAPTER (1)



CONNECTION CABLE (9)



L - METAL ROD



HEXAGON KEY (5MM)




OWNER'S MANUAL




BASS DRUM PEDAL BOX

KICK PAD



FOOT PEDAL



NOTE: The pedal is specified as a configuration option to the product.
Pedal NOT included in North America

STAND AND CYMBAL HOLDER BOX

PILLAR (L1)



PILLAR (R1)



PILLAR (L2)




PILLAR (R2)




CYMBAL HI-HAT ARM (1)



CYMBAL BOOM ARM (3)




CENTER PIPE (1)




CENTER PIPE (2)




SIDE ARM (L1)




SIDE ARM (L2)




SIDE ARM (R)



CABLE HOLDER



2 STAND SET-UP

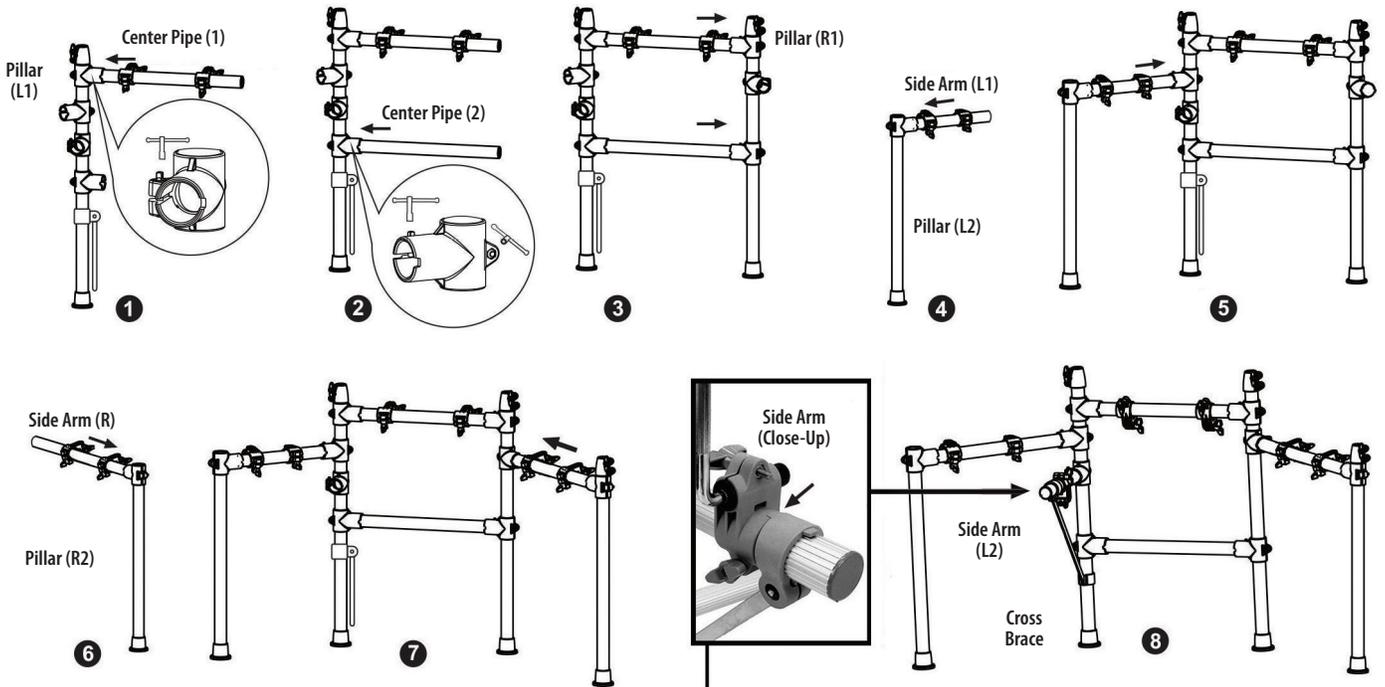


1. Attach Center Pipe (1) to clamp on Pillar (L1).
2. Attach Center Pipe (2) to clamp on Pillar (L1).
3. Attach Center Pipe (1) & (2) to clamps on Pillar (R1).
4. Attach Side Arm (L1) to clamp on Pillar (L2).
5. Attach Side Arm (L1) to clamp on Pillar (L1).
6. Attach Side Arm (R) to clamp on Pillar (R2).
7. Attach Side Arm (R) to clamp on Pillar (R1).
8. Attach Side Arm (L2) to clamp on Pillar (L1).

Set snare clamp against leg brace, so that the "Notch" in the snare clamp fits into the brace-clamp tab.

This will help the snare stay in place for heavy hitters.

NOTE:

Loosen or tighten the screws on the clamp with drum key as shown partial enlargement. Adjust the height of the Side Arms with drum key as needed.

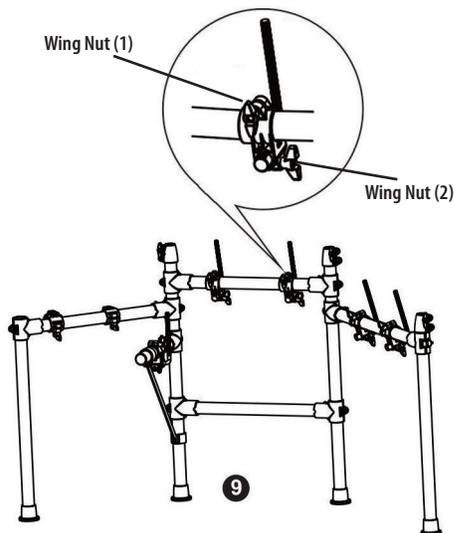


9. Attach the pad mounts to the mount holders on the Center Pipe 1, Side Arm (L2), Side Arm (R), and firmly tighten the respective wing nuts 1.

NOTE:

Loosen or tighten the wing nuts on the mount holder as shown in the partial enlargement.

Move the mount holders as needed, and firmly tighten the respective wing nuts 2.

10. Insert the three cymbal arms into the holders on the Pillars. Attach the hi-hat holder to mount holders on the Side Arm (L1), and firmly tighten the respective wing nuts.

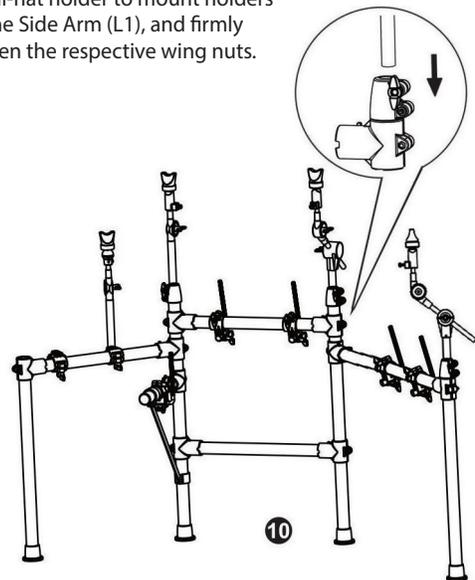



NOTE:

Loosen or tighten the wing nuts on the mount holder as shown in the partial enlargement.

3 ATTACH THE PARTS



ATTACH THE DRUM PADS

1. Loosen the wing nuts on the drum pads.
2. Attach the drum pads to the pad mounts, and firmly tighten the wing nuts on the drum pads.

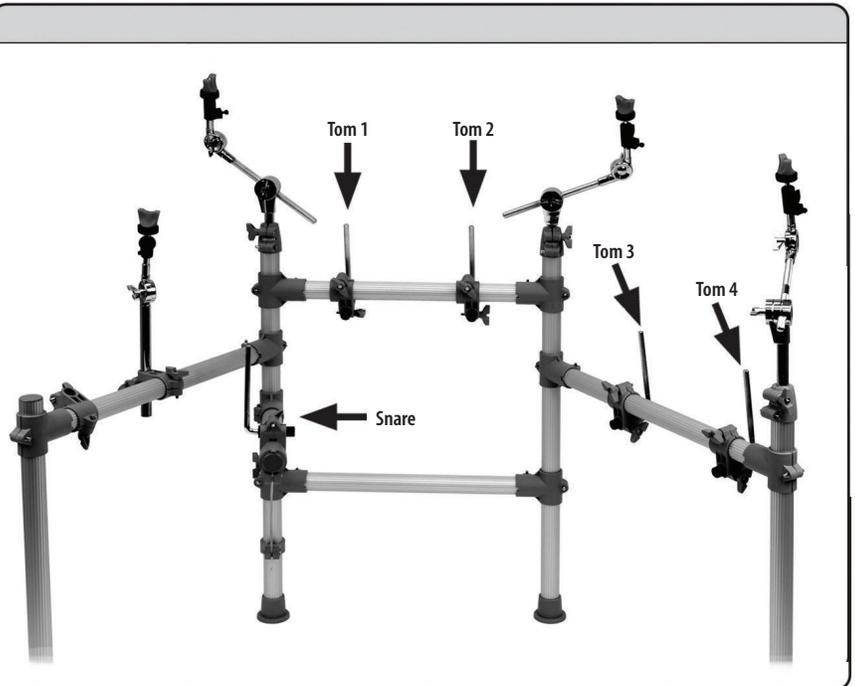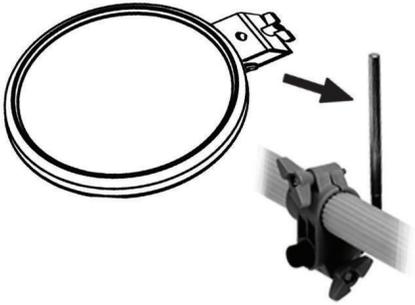


ATTACH THE CYMBAL PADS

1. Remove the wing nut and felt washer from the cymbal tilter.
2. Place the cymbal pad, felt washer and wing nut assembly as shown, then tighten the wing nut to obtain an appropriate amount of sway.
3. Adjust the cymbal pad position with the wing nut.

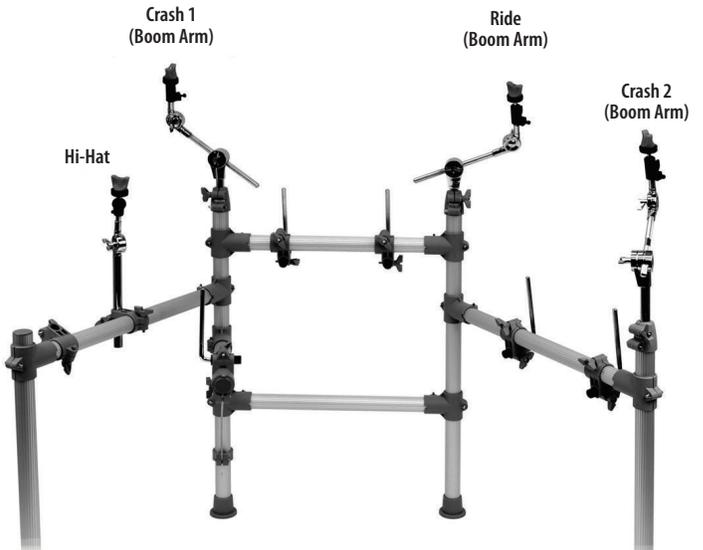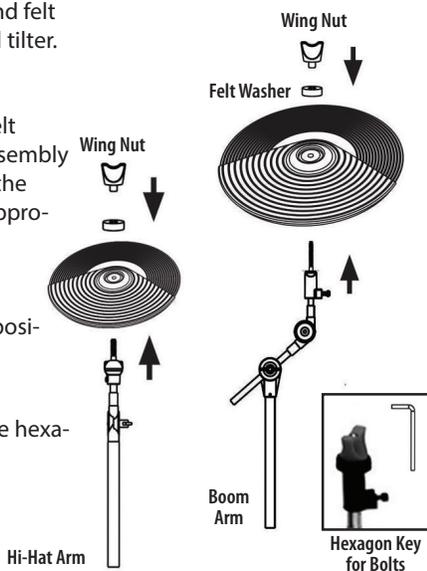

ASSEMBLE THE KICK

1. Insert beater into the beater holder on the foot pedal.
2. Adjust beater position and tighten the beater with the drum key.
3. Attach foot pedal to the kick pad.
4. Adjust beat position and tighten the wing nut.

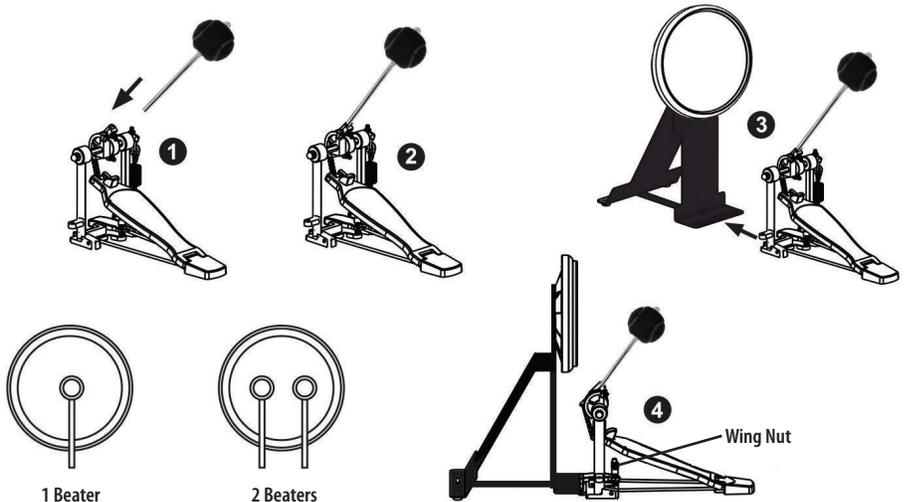

NOTE:
Position one beater centered on the kick pad or two beaters equally apart from the center as shown.

4 CONNECT THE PADS TO THE DRUM MODULE



ATTACH THE DRUM MODULE

1. Connect the cable to the drum module with hand screws as shown here.
2. Attach drum module to the mount holders on Side Arm (L1), and firmly tighten wing nut


NOTE:

Loosen or tighten wing nuts on mount holder as shown in the partial enlargement.

Move mount holders as needed, and firmly tighten the respective wing nuts.

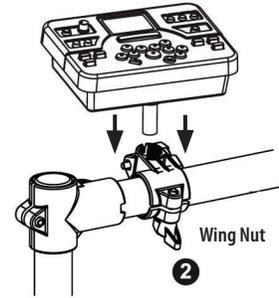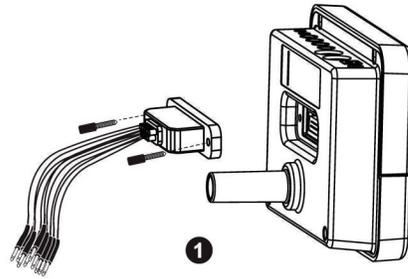


CONNECTION PROCEDURE

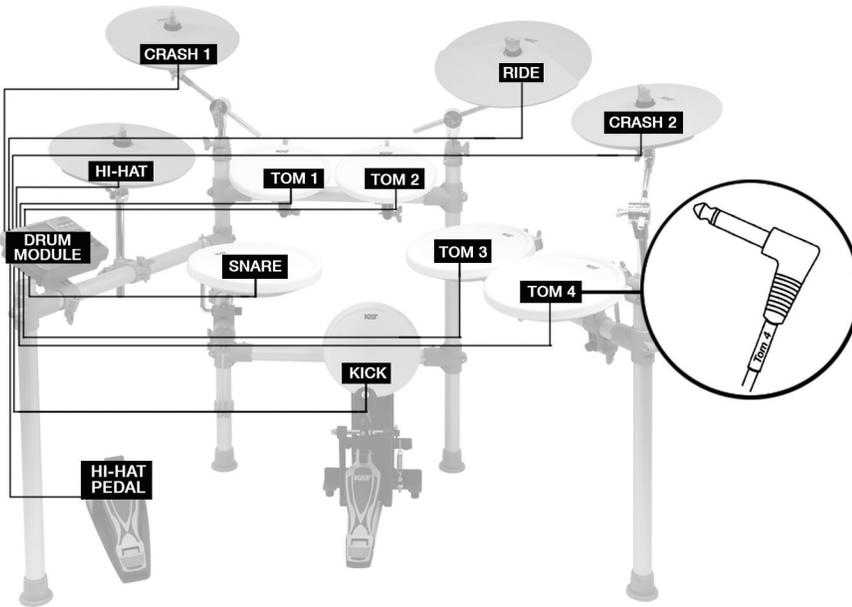

1. Place the Kick on the floor, in the center of the rack as shown below.
2. Place the Hi-hat pedal on the floor, to your left side as shown.
3. Connect pads to drum module with the correctly marked cables. (shown in enlargement)

**Are you ready?
Time to start playing it!**

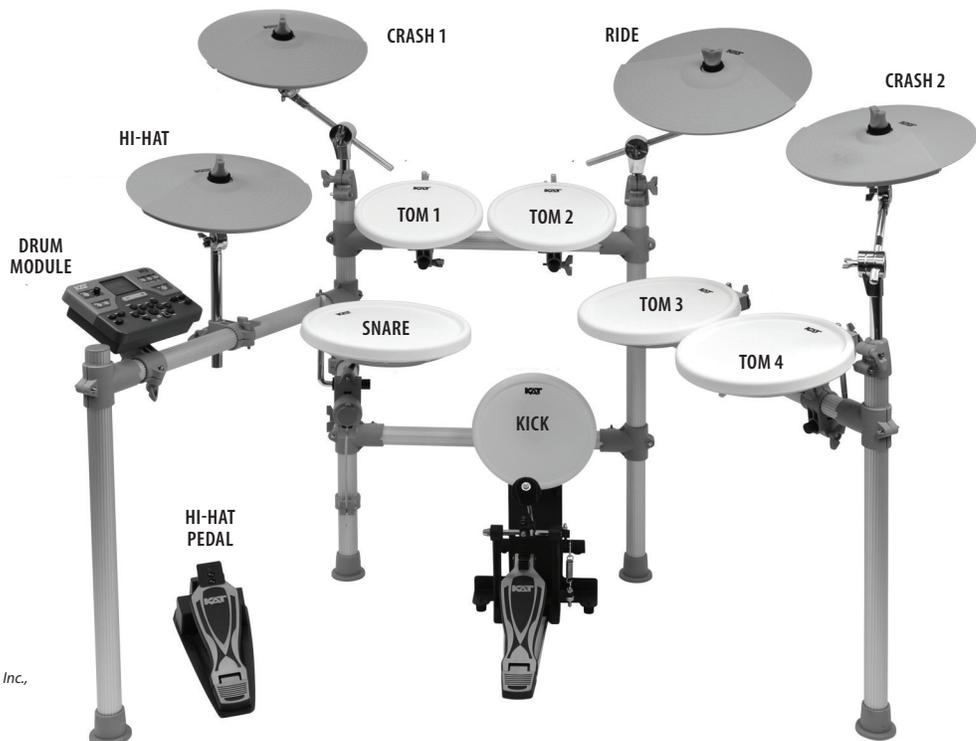

©2013 KAT® PERCUSSION

Kat Percussion is a registered trademark of Alternate Mode, Inc., and used herein under license. All rights reserved